


Product description	M12 Y2-coding Male Straight Connector, Assy Crimp Panel Mount, Front fastened, Shielded, Contacts: 8, IP67
Part no.	MB12MCSY2FF08ST

Illustration



Scale drawing

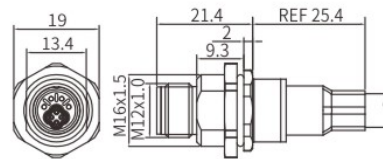

You can find the assembly instructions on the next page.

General features

Part no.	MB12MCSY2FF08ST
Standard	IEC 61076-2-113
Ambient temperature	-15°C ~ +85°C (flexible installation)
Ambient temperature	-30°C ~ +85°C (fixed installation)
Customized temperature	-25°C ~ +85°C (flexible installation)
Customized temperature	-40°C ~ +85°C (fixed installation)
IP rating	IP67 in locked condition
Mating endurance	>500 cycles

Electrical parameters

Insulation resistance	≥100MΩ
Contact resistance	≤10mΩ
Shielding	Available
Rated current	6A (Power pins) / 0.5A (Data pins)
Rated voltage	50V AC / DC
Wire gauge	0.6 mm ² (AWG 20) (Power pins) / 0.15 mm ² (AWG 26) (Data pins)

Material

Connector insert	PA+GF
Connector contacts	Brass with gold plated

Product data sheet

M12 Solder&Crimp Panel Mount



<https://www.finecables.com/m12-crimp-panel-mount-y1y2y3y4-coded/642/>

Product description	M12 Y2-coding Male Straight Connector, Assy Crimp Panel Mount, Front fastened, Shielded, Contacts: 8, IP67
Part no.	MB12MCSY2FF08ST

Coupling nut/screw Brass with nickel plated

Seal/O-ring FKM

Security Notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".

Finecables Enterprise Co., Ltd

Email: info@finecables.com

Web: www.finecables.com

Tel: +86 0769-81517898

Address: No.54 Changdi Road, Nanmian Community Humen Town Dongguan City, Guangdong Province, China.