


DeviceNet Cable 7/8" Female Connector

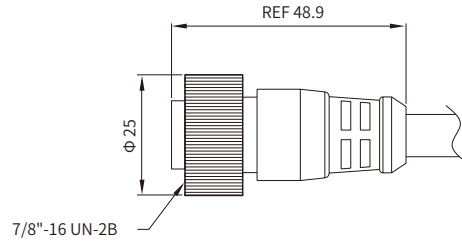

Wirelist	
1	Shield
2	Red
3	Black
4	White
5	Blue

UL CE RoHS

Specifications

Contacts	5(Female)
Pin layout	
Connector Series	7/8"
Contact No.	5 Pins
Contacts Material	Brass with gold plated
Nut/Screw Material	Aluminum anodized black
Connector Insert	TPU
Over-molding	TPU
Wire Color	1Pair(Red/Black); 1Pair(Blue/White)
Jacket Color	Gray
Jacket Material	PUR/PVC
Shielding	Available
IP Rating	IP67/IP69K
Ambient Temperature	-25°C ~ +85°C (flexible installation) , -40°C ~ +85°C (fixed installation)
Contacts Type	Crimp version
Rated current	8A
Voltage	300V
Wire gauge/size	18AWGx1Pair+20AWGx1Pair / 15AWGx1Pair+18AWGx1Pair / 16AWGx1Pair+18AWGx1Pair
Cable jacket	PUR/PVC
Cable length	Customized Cable Length

Product Features

- 2-Pair DeviceNet jacket cable
- 7/8" 5 Pins
- Single end with customized cable end process
- Suitable for drag chain
- RoHS compliant

Application Fields

- Automotive Industry
- Mechanical Engineering
- Plant Installation Engineering
- Automation Control
- Tool Room

Product Advantage

- Used for industrial equipment telecommunication
- Improvement of process data management
- Cost-saving Installation
- Low cost but high productivity
- For open internet standards and agreements
- Standardized interfaces

Cable Construction

- Permanently flexible control cable
- Construction: 2Pairs+Shield(AL)+Drain+Braids
- Conductor: Tinned copper
- Gray jacket