


Multi-conductor Cable



UL2464 Multi-Conductor Cable

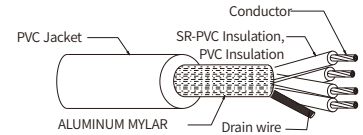


■ Product Description

- Tinned, annealed, stranded or solid copper conductor.
- Semi-rigid PVC insulation or PVC insulation
- Cores cabled under aluminum mylar shield
- Tinned stranded copper drain wire.
- PVC jacket unpaired computer and data transmission cable
- Rated temperature: 80°C. Rated voltage: 300Volts
- Pass UL VW-1&CSA FT1 vertical flame test

■ Detailed Specifications

- Sound broadcast, audio instrumentation and computer cables for RS-232 applications.

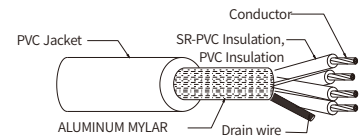

■ Product Description

- Tinned, annealed, stranded or solid copper conductor.
- Semi-rigid PVC insulation or PVC insulation
- Tinned stranded copper drain wire.
- Tinned copper braid shield, 65% coverage.
- PVC jacket computer and data transmission cable.
- Rated temperature: 80°C. Rated voltage: 300Volts
- Pass UL VW-1&CSA FT1 vertical flame test

■ Detailed Specifications

- Sound broadcast, audio instrumentation and computer cables for RS-232 applications.