



Multi-conductor Cable

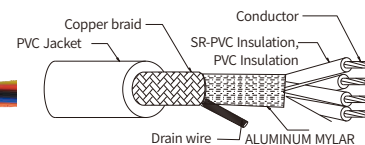

UL2661 Multi-conductor Shielded Cable



Product Description

- Tinned, annealed, stranded or solid copper conductor.
- PVC insulation
- PVC jacket
- Tinned or bare copper wire spiral or braid shield
- Rated temperature: 80°C, 90°C, 105°C. Rated voltage: 300Volts
- Pass UL VW-1&CSA FT1 vertical flame test

Applications

- For internal wiring of computer, audio & video equipment.

Technical Data

UL Style& CSA Type	Cores	Conductor		Insulation Thickness	Nom. Dia	Shield Coverage	Jacket Thickness	Overall Diameter	Conductor Resistance at 20°C
		Gauge	No./OD						
		AWG	No./mm						
UL2661CSA (Stranded)	2C	30	7/0.100	0.41	1.10	≥65	0.76	4.20	381.00
		28	7/0.127	0.41	1.20	≥65	0.76	4.50	239.00
		26	7/0.16	0.43	1.30	≥65	0.76	4.70	150.00
		24	11/0.16	0.41	1.40	≥65	0.76	5.00	94.20
		22	17/0.16	0.43	1.60	≥65	0.76	5.30	59.40
		20	21/0.178	0.41	1.80	≥65	0.76	5.70	36.70
UL2661CSA (Stranded)	3C	18	34/0.178	0.41	2.10	≥65	0.76	6.30	23.20
		16	26/0.25	0.41	2.40	≥65	0.76	6.90	14.60
		30	7/0.100	0.41	1.10	≥65	0.76	4.50	381.00
		28	7/0.127	0.41	1.20	≥65	0.76	4.70	239.00
		26	7/0.16	0.41	1.30	≥65	0.76	5.00	150.00
		24	11/0.16	0.43	1.40	≥65	0.76	5.20	94.20
UL2661CSA (Stranded)	4C	22	17/0.16	0.41	1.60	≥65	0.76	5.60	59.40
		20	21/0.178	0.41	1.80	≥65	0.76	6.00	36.70
		18	34/0.178	0.41	2.10	≥65	0.76	6.60	23.20
		30	7/0.100	0.41	1.10	≥65	0.76	4.80	381.00
		28	7/0.127	0.41	1.20	≥65	0.76	5.00	239.00
		26	7/0.16	0.41	1.30	≥65	0.76	5.20	150.00
UL2661CSA (Stranded)	5C	24	11/0.16	0.41	1.40	≥65	0.76	5.50	94.20
		22	17/0.16	0.41	1.60	≥65	0.76	6.00	59.40
		20	21/0.178	0.41	1.80	≥65	0.76	6.50	36.70
		30	7/0.100	0.41	1.10	≥65	0.76	5.20	381.00
		28	7/0.127	0.41	1.20	≥65	0.76	5.40	239.00
UL2661CSA (Stranded)	6C	26	7/0.16	0.41	1.30	≥65	0.76	5.60	150.00
		24	11/0.16	0.41	1.40	≥65	0.76	5.90	94.20
		22	17/0.16	0.41	1.60	≥65	0.76	6.50	59.40
		30	7/0.100	0.41	1.10	≥65	0.76	5.50	381.00
		28	7/0.127	0.41	1.20	≥65	0.76	5.70	239.00
UL2661CSA (Stranded)	6C	26	7/0.16	0.41	1.30	≥65	0.76	6.00	150.00
		24	11/0.16	0.41	1.40	≥65	0.76	6.30	94.20