


M8 A-coding (Sensor and Actuator)

M8 A-coding Terminator, Straight, with LED Indicator

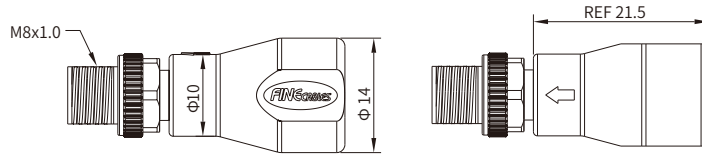

Specifications

Contacts	3	4
Pin layout(Male)		
Ambient temperature	-25°C ~ +90°C	
Connector insert	PA+GF / TPU	
Connector contacts	Brass with gold plated	
Connector overmold	Transparent TPU	
Coupling nut/screw	Zinc alloy with nickel plated	
Insulation resistance	≥100MΩ	
Contact resistance	≤5mΩ	
Shielding	Unavailable	
IP rating	IP67 in locked condition	
Mating endurance	>500 cycles	
Rated current	3 A	
Rated voltage	50V AC/ 60V DC	

Part Number

Pins	Male
3	MA08MAHD03ST-LED
4	MA08MAHD04ST-LED