


# M8 Splitter

## M8 Y-Splitter, Male-2\*Female

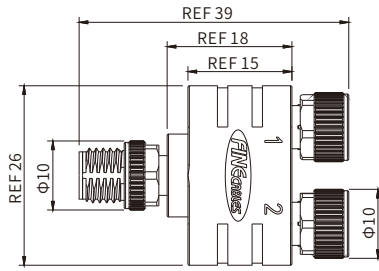

### Specifications

Contacts	3 (A-coding)	4 (A-coding)	5 (B-coding)
Pin layout(Male)			
Pin layout(Female)			
Ambient temperature	-20°C ~ +80°C		
Connector insert	PA+GF / TPU		
Connector contacts	Brass with gold plated		
Coupling nut/screw	Zinc alloy with nickel plated		
Overrmold	TPU		
O-ring	FKM		
Insulation resistance	≥100MΩ		
Contact resistance	≤5mΩ		
Shielding	Unavailable		
IP rating	IP67 in locked condition		
Mating endurance	>500 cycles		
Rated current	3 A		
Rated voltage	50V AC/60V DC		30V AC / DC

### Part Number

Pins	Male-2*Female
3	MT-043
4	MT-044
5	MT-045

### Wire List

