


M10 T-Splitter, Female-Male-Female

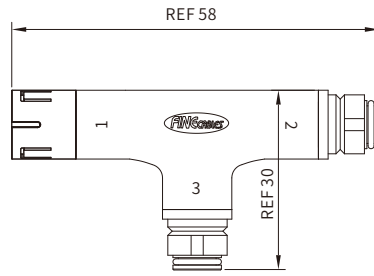

RoHS

Specifications

Contacts	5
Pin layout(Male)	
Pin layout(Female)	
Ambient temperature	-25°C ~ +85°C
Connector insert	PA+GF
Connector contacts	Brass with gold plated
Coupling nut/screw	TPU
Insulation resistance	≥20MΩ
Contact resistance	≤5mΩ
Shielding	Unavailable
IP rating	IP65 in locked condition
Mating endurance	>500 cycles
Rated current	2 A
Rated voltage	60V AC / 72V DC

Part Number

Pins	Female - Male - Female
5	MT10-AI05

Circuit diagram

