


M12 D-coding (Ethernet)


M12 D-coding Angled Connector, Molded 2 Cables

Male

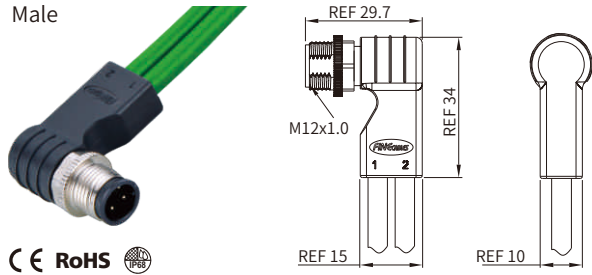

CE RoHS

Female

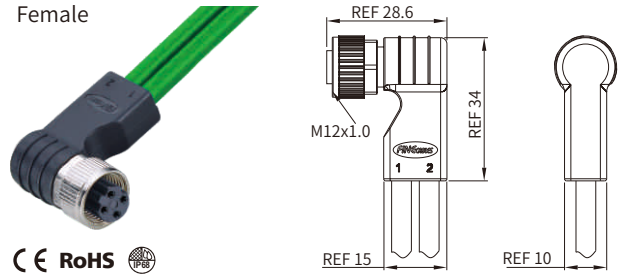

CE RoHS

Specifications

Contacts	4
Pin layout(Male)	
Pin layout(Female)	
Standard	IEC 61076-2-101
Ambient temperature	-25°C ~ +85°C (flexible installation) , -40°C ~ +85°C (fixed installation)
Connector insert	TPU
Connector contacts	Brass with gold plated
Connector overmold	TPU
Coupling nut/screw	Zinc alloy with nickel plated
Seal/O-ring(of Female)	FKM
Insulation resistance	≥100MΩ
Contact resistance	≤5mΩ
Shielding	Unavailable
IP rating	IP67, IP68, IP69K in locked condition
Mating endurance	>500 cycles
Rated current	4 A
Rated voltage	250V AC/DC
Wire gauge	0.34 mm ² (AWG 22)

Part Number

Pins	Male		Female	
	PVC/PUR	Customized cable	PVC/PUR	Customized cable
4	MT-028		MT-042	

Default wire colors

Pin No.		
Pin 1	BN	WH/OR
Pin 2	WH	WH/GN
Pin 3	BU	OR
Pin 4	BK	GN