


M12 B-coding (Profibus)


M12 B-coding Straight Connector, Panel Mount, Die-cast Screw, Solder, Rear fastened

Male

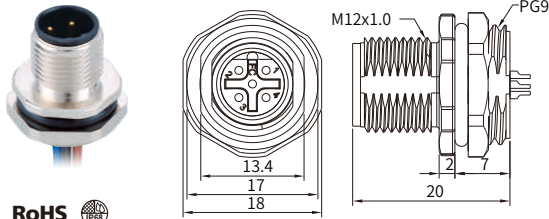

CE RoHS

Female

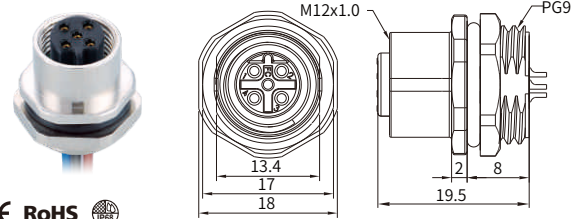

CE RoHS

Specifications

Contacts	3	4	5
Certification	cULus CYJV2(CYJV8).E321413		eULus CYJV(CYJV7).E321413
Pin layout(Male)			
Pin layout(Female)			
Standard	IEC 61076-2-101		
Ambient temperature	-15°C~+85°C (flexible installation), -30°C~+85°C (fixed installation)		
Customized temperature	-25°C ~ +85°C (flexible installation), -40°C ~ +85°C (fixed installation)		
Connector insert	PA		
Connector contacts	Brass with gold plated		
Coupling nut/screw	Zinc alloy with nickel plated		
Seal/O-ring	Epoxy resin / FKM		
Insulation resistance	≥100MΩ		
Contact resistance	≤5mΩ		
Earth tag/pin	Unavailable		
IP rating	IP67, IP68 in locked condition		
Mating endurance	>500 cycles		
Rated current	4 A		
Rated voltage	250V AC/DC		60V AC/DC
Wire gauge	0.34mm ² (AWG22)		
Panel cut-out	Refer to page 384		

Part Number

Pins	Cable length	Male	Female
		PG9	PG9
3	0.1m	MB12MSBRHD03ST-33401	MB12FSBRHD03ST-33401
	0.3m	MB12MSBRHD03ST-33403	MB12FSBRHD03ST-33403
4	0.1m	MB12MSBRHD04ST-33401	MB12FSBRHD04ST-33401
	0.3m	MB12MSBRHD04ST-33403	MB12FSBRHD04ST-33403
5	0.1m	MB12MSBRHD05ST-33401	MB12FSBRHD05ST-33401
	0.3m	MB12MSBRHD05ST-33403	MB12FSBRHD05ST-33403

Default wire colors

Pin No.				
Pin 1	BN	BN	BN	BN
Pin 2		WH	WH	GN
Pin 3	BU	BU	BU	
Pin 4	BK	BK	BK	RD
Pin 5			GY	