



M12 C-coding (Power)

M12 C-coding Straight Connector, Panel Mount, Die-cast Screw, Solder, Front fastened

Male

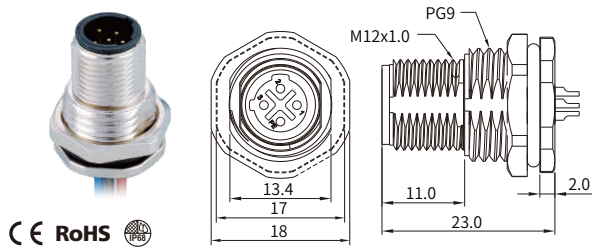

Female

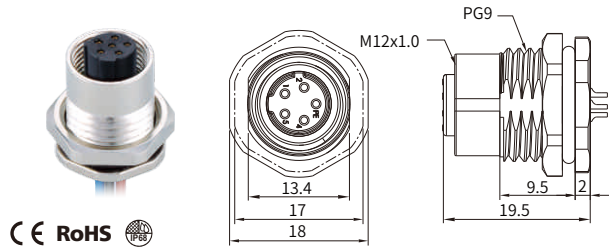

Specifications

Contacts	3 (2+PE)	4 (3+PE)	5 (4+PE)	6 (5+PE)
Certification	cULus CYJV2(CYJV8).E321413			
Pin layout(Male)				
Pin layout(Female)				
Standard	IEC 61076-2-101			
Ambient temperature	-15°C~+85°C (flexible installation), -30°C~+85°C (fixed installation)			
Customized temperature	-25°C ~ +85°C (flexible installation), -40°C ~ +85°C (fixed installation)			
Connector insert	PA			
Connector contacts	Brass with gold plated			
Coupling nut/screw	Zinc alloy with nickel plated			
Seal/O-ring	Epoxy resin / FKM			
Insulation resistance	≥100MΩ			
Contact resistance	≤5mΩ			
Earth tag/pin	Unavailable			
IP rating	IP67, IP68 in locked condition			
Mating endurance	>500 cycles			
Rated current	4 A		2 A	
Rated voltage	250V AC/DC		60V AC/DC	30V AC/DC
Wire gauge	0.34mm² (AWG22)		0.25 mm² (AWG 24)	
Panel cut-out	Refer to page 384			

Part Number

Pins	Cable length	Male PG9	Female PG9
3	0.1m	MB12MSCFHD03ST-33401	MB12FSCFHD03ST-33401
	0.3m	MB12MSCFHD03ST-33403	MB12FSCFHD03ST-33403
4	0.1m	MB12MSCFHD04ST-33401	MB12FSCFHD04ST-33401
	0.3m	MB12MSCFHD04ST-33403	MB12FSCFHD04ST-33403
5	0.1m	MB12MSCFHD05ST-32501	MB12FSCFHD05ST-32501
	0.3m	MB12MSCFHD05ST-32503	MB12FSCFHD05ST-32503
6	0.1m	MB12MSCFHD06ST-32501	MB12FSCFHD06ST-32501
	0.3m	MB12MSCFHD06ST-32503	MB12FSCFHD06ST-32503

Default wire colors

Pin No.				
Pin 1	BN	BN	BN	WH
Pin 2		WH	WH	BN
Pin 3	BU	BU	BU	GN
Pin 4	BK	BK	BK	YE
Pin 5			GY	GY
Pin 6				PK