



M12 C-coding (Power)

M12 C-coding Straight Connector, Panel, Die-cast Screw, PCB Type, Front fastened, With Earth Pin

Male

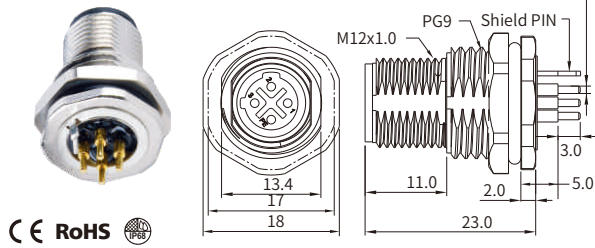

Female

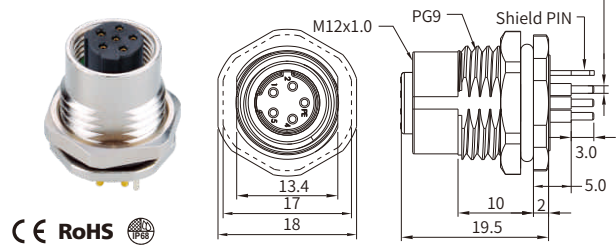

Specifications

Contacts	3 (2+PE)	4 (3+PE)	5 (4+PE)	6 (5+PE)
Certification	US CYJV2(CYJV8).E321413			
Pin layout(Male)				
Pin layout(Female)				
Standard	IEC 61076-2-101			
Ambient temperature	-25°C ~ +90°C			
Connector insert	PA			
Connector contacts	Brass with gold plated			
Coupling nut/screw	Zinc alloy with nickel plated			
Seal/O-ring	Epoxy resin / FKM			
Insulation resistance	≥100MΩ			
Contact resistance	≤5mΩ			
Earth tag/pin	Available			
IP rating	IP67, IP68 in locked condition			
Mating endurance	>500 cycles			
Rated current	4 A		2 A	
Rated voltage	250V AC/DC		60V AC/DC	30V AC/DC
Panel cut-out	Refer to page 384			
PCB layout	Refer to page 383			

Part Number

Pins	Male	Female
	PG9	PG9
3	MB12MBSCFHD03ST-3	MB12FBSCFHD03ST-3
4	MB12MBSCFHD04ST-3	MB12FBSCFHD04ST-3
5	MB12MBSCFHD05ST-3	MB12FBSCFHD05ST-3
6	MB12MBSCFHD06ST-3	MB12FBSCFHD06ST-3