


M12 D-coding (Ethernet)



M12 D-coding Angled Connector, Panel Mount, PCB Type, Front fastened

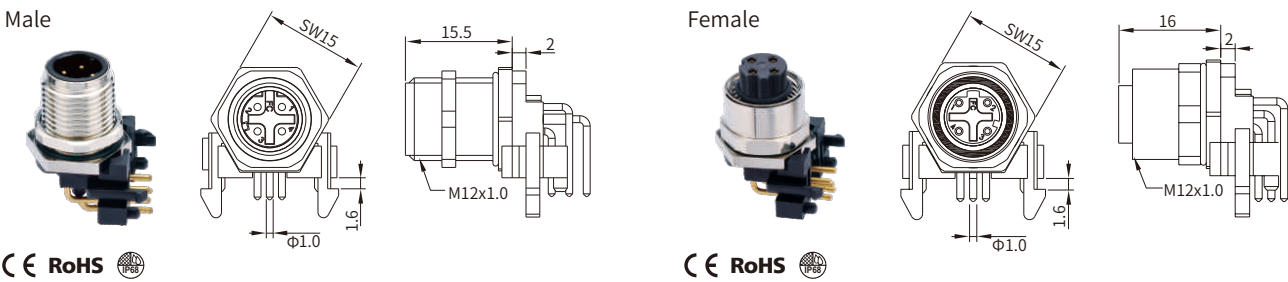

Specifications

Contacts	4
Certification	US CYJV2(CYJV8).E321413 US CYJV(CYJV7).E321413
Pin layout(Male)	
Pin layout(Female)	
Standard	IEC 61076-2-101
Ambient temperature	-25°C ~ +90°C
Connector insert	PA+GF
Connector contacts	Brass with gold plated
Coupling nut/screw	Brass with nickel plated
Seal/O-ring	FKM
Insulation resistance	≥100MΩ
Contact resistance	≤5mΩ
Earth tag/pin	Unavailable/Available
IP rating	IP67, IP68 in locked condition
Mating endurance	>500 cycles
Rated current	4 A
Rated voltage	250V AC/DC
Panel cut-out	Refer to page 384
PCB layout	Refer to page 384

Part Number

Pins	Male		Female	
	Unshielded	Shielded	Unshielded	Shielded
4	MB12MBDFF04RA-0	MB12MBSDDFF04RA-0	MB12FBDFF04RA-0	MB12FBSDDFF04RA-0