


Mini-change(7/8")

Mini-change(7/8") Straight Connector, Male to Female Panel Mount

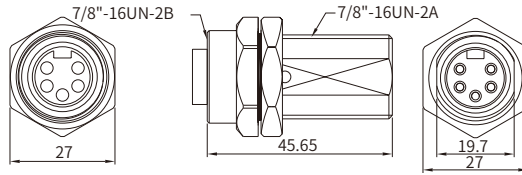

Specifications

Contacts	3	4	5
Pin layout(Male)			
Pin layout(Female)			
Ambient temperature	-40°C ~ +90°C		
Connector insert	TPU		
Connector contacts	Brass with gold plated		
Coupling nut/screw	Brass with nickel plating		
O-ring	Epoxy resin/FKM		
Insulation resistance	≥100MΩ		
Contact resistance	≤5mΩ		
Earth tag/pin	Unavailable		
IP rating	IP67, IP68 in locked condition		
Mating endurance	>500 cycles		
Rated current	13A		8A
Rated voltage	300V AC / DC		
Panel Cut-out	Refer to page 438		

Part Number

Pins	Male-Female
3	MT-066(MINI-C03FMST-PFCF)
4	MT-065(MINI-C04FMST-PFCF)
5	MT-011(MINI-C05FMST-PFCF)

Circuit diagram

