


Mini-change(7/8")

Mini-change(7/8") Straight Connector, I-Adapter, Female-Female

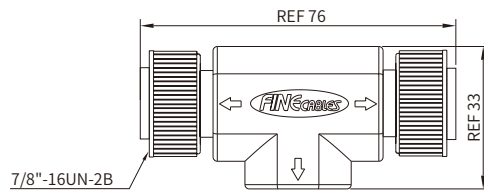

Specifications

Contacts	3	4	5
Pin layout(Male)			
Pin layout(Female)			
Ambient temperature	-25°C ~ +90°C		
Connector insert	TPU		
Connector contacts	Brass with gold plated		
Coupling nut/screw	Aluminium anodized black		
Connector overmold	TPU		
Seal/O-ring	FKM		
Insulation resistance	≥100MΩ		
Contact resistance	≤5mΩ		
Shielding	Unavailable		
IP rating	IP67, IP68 in locked condition		
Mating endurance	>500 cycles		
Rated current	13A		8A
Rated voltage	300V AC / DC		

Part Number

Pins	Female-Female
3	MT-067(MINI-C03FFNI-M)
4	MT-068 (MINI-C04FFNI-M)
5	MT-069 (MINI-C05FFNI-M)

Circuit diagram

