


Mini-change(7/8")

Mini-change(7/8") Y-Splitter, Female-Male with M12 Female Connector

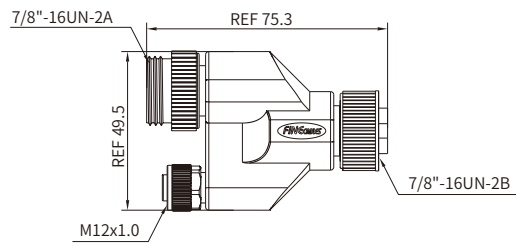

Specifications

Contacts	7/8" Male (5Pin)	7/8" Female (5Pin)	M12 Female (5Pin)
Pin layout			
Ambient temperature	-25°C ~ +90°C		
Connector insert	TPU/PA+GF		
Connector contacts	Brass with gold plated		
Coupling nut/screw	Aluminium anodized black(7/8") / Zinc Alloy with nickel plated(M12)		
Connector overmold	TPU		
Seal/O-ring	FKM		
Insulation resistance	≥ 100MΩ		
Contact resistance	≤ 5mΩ		
Shielding	Unavailable		
IP rating	IP67, IP68 in locked condition		
Mating endurance	>500 cycles		
Rated current	4A		
Rated voltage	60V AC / DC		

Part Number

Pins	Female-Male-M12 Female
5	MINI-C05FFM12Y-M

Circuit diagram

