



Mini-change(7/8")

Mini-change(7/8") T-Splitter, Female-Male-Female

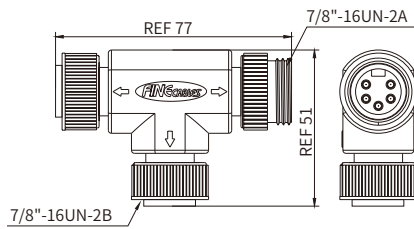

Specifications

Contacts	5
Certification	US 2018/7
Pin layout(Male)	
Pin layout(Female)	
Ambient temperature	-25°C ~ +90°C
Connector insert	TPU
Connector contacts	Brass with gold plated
Coupling nut/screw	Aluminium anodized black
Connector overmold	TPU
Seal/O-ring	FKM
Insulation resistance	≥100MΩ
Contact resistance	≤5mΩ
Shielding	Unavailable
IP rating	IP67, IP68 in locked condition
Mating endurance	>500 cycles
Rated current	4A
Rated voltage	300V AC / DC
Wire gauge	0.5mm ² (AWG20)

Part Number

Pins	Female-Male-Female
5	MT-012(MINI-C05FMFT-M)