


Mini-change(7/8")




Mini-change(7/8") Straight Connector, Terminator

Male

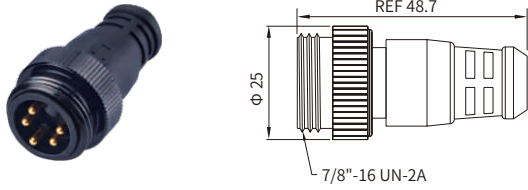

Female

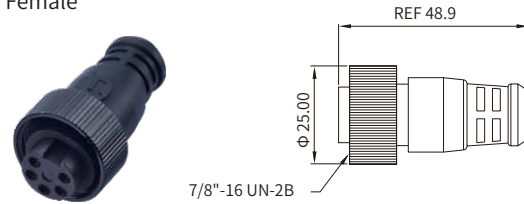

Specifications

Contacts	3	4	5	16
Pin layout(Male)				
Pin layout(Female)				
Ambient temperature	-25°C ~ +90°C			
Connector insert	TPU			
Connector contacts	Brass with gold plated			
Coupling nut/screw	Aluminium anodized black			
Connector overmold	TPU			
Seal/O-ring(of Female)	FKM			
Insulation resistance	≥100MΩ			
Contact resistance	≤5mΩ			
Shielding	Unavailable			
IP rating	IP67, IP68 in locked condition			
Mating endurance	>500 cycles			
Rated current	13A		8A	4A
Rated voltage	300V AC / DC			
Wire gauge	1.0mm ² (AWG18)		0.5mm ² (AWG20)	0.25mm ² (AWG24)

Part Number

Pins	Male	Female
3	MINI-C03MST-M	MINI-C03FST-M
4	MINI-C04MST-M	MINI-C04FST-M
5	MINI-C05MST-M	MINI-C05FST-M
16	MINI-C16MST-M	MINI-C16FST-M