



RD24 B-coding Straight Connector, Field Wirable Assembly, Solder

Male



CE RoHS

Female

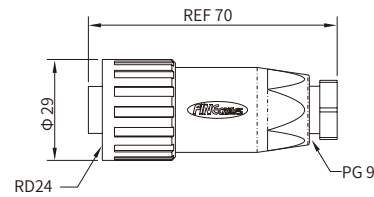

CE RoHS

Specifications

Contacts	6+PE
Certification	UL US ECBT2(ECBT8).E473386
Pin layout(Male)	
Pin layout(Female)	
Ambient temperature	-25°C ~ +125°C
Connector insert	PBT
Connector contacts	Brass with gold plated
Coupling nut/screw	PA
Seal/O-ring	Epoxy resin / EPDM
Termination type	Solder
Insulation resistance	≥100MΩ
Contact resistance	≤5mΩ
Shielding	Unavailable
Suitable cable Dia	PG9: 6~8mm
IP rating	IP67, IP68 in locked condition
Mating endurance	>500 cycles
Rated current	8A
Rated voltage	250V AC / DC
Wire gauge	0.34~1.5mm² (AWG22~16)

Part Number

Pins	Male	Female
6+PE	MB24MABFP6+1ST-3	MB24FABFP6+1ST-3

Assembly Instruction

