


Micro-USB Straight Connector, Molded Cable

Male

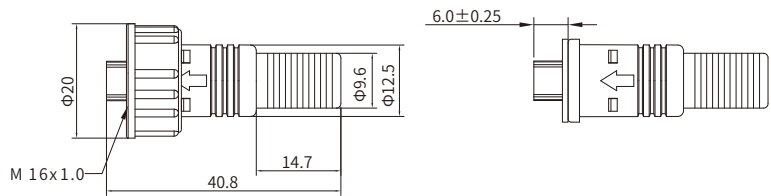

RoHS

Specifications

Contacts	5P Micro B
Pin layout(Male)	
Ambient temperature	-25°C~+85°C(flexible installation),-40°C~+85°C(fixed installation)
Connector insert	LCP+GF/PBT
Connector contacts	Brass with gold plated
Connector body	PA + GF
Coupling nut/screw	PA + GF
Seal/O-ring	FKM
Insulation resistance	≥100MΩ
Contact resistance	≤30mΩ
Shielding	Available
IP rating	IP67 in locked condition
Rated current	1A
Rated voltage	30V AC/DC

Part Number

Pins	Cable length	Male
5	1m	MC-WM05STSF-10CB
	3m	MC-WM05STSF-30CB
	5m	MC-WM05STSF-50CB

Default wire colors

Pin No.	
Pin 1	RD
Pin 2	WH
Pin 3	GN
Pin 4	BK
Shell	Braid