


RJ45 Straight Connector, Field Wirable Assembly

Male

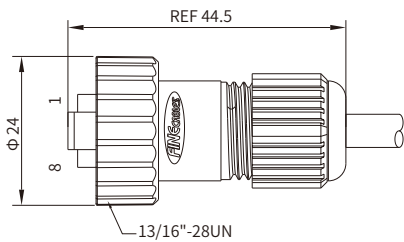

Specifications

Contacts	8P8C
Pin layout(Male)	
Ambient temperature	-25°C~+85°C
Connector insert	PC
Connector contacts	Copper alloy with gold plated
Connector body	PA + GF
Coupling nut/screw	PA + GF
Seal/O-ring	FKM
Insulation resistance	≥100MΩ
Contact resistance	≤30mΩ
Shielding	Available
IP rating	IP67 in locked condition
Rated current	1.5A
Rated voltage	30V AC/DC
Wire gauge	0.25mm ² (AWG24)

Part Number

Pins	Male
8P8C	RJ45S-WM08STAF

Assembly Instruction

