


RJ45 Straight Connector, Panel Mount, Front fastened

Female



Panel thickness Max2.0mm

8 1

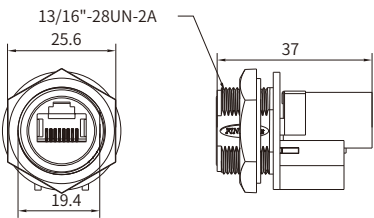

Specifications

Contacts	8P8C
Pin layout(Female)	
Ambient temperature	-25°C~+85°C
Connector insert	PBT+GF
Connector contacts	Phosphor bronze with gold plated
Coupling nut/screw	PA + GF
Seal/O-ring	FKM
Insulation resistance	≥100MΩ
Contact resistance	≤30mΩ
Shielding	Available
IP rating	IP67 in locked condition
Rated current	1.5A
Rated voltage	125V AC/DC

Part Number

Pins	Female
8P8C	RJ45S-WF08STSP

Panel Cut-out Dimensions

