


D-Sub Female Panel Mount, Angled Contacts PCB Type

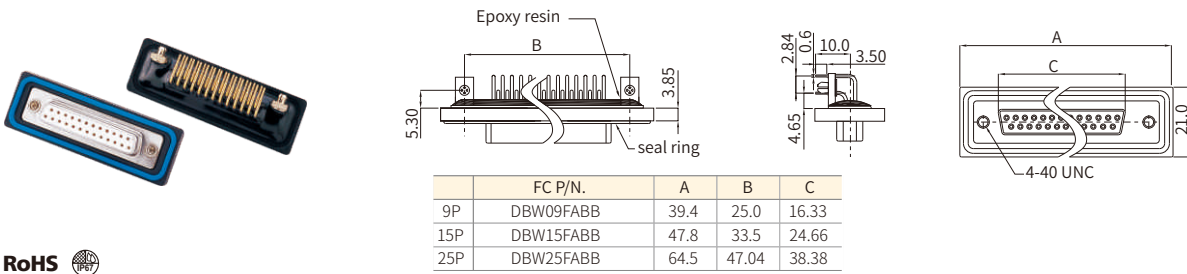

| | FC P/N. | A | B | C |
|-----|-----------|------|-------|-------|
| 9P | DBW09FABB | 39.4 | 25.0 | 16.33 |
| 15P | DBW15FABB | 47.8 | 33.5 | 24.66 |
| 25P | DBW25FABB | 64.5 | 47.04 | 38.38 |

RoHS

Specifications

| Contacts | 9 | 15 | 25 |
|-----------------------|--------------------------|----|----|
| Pin layout(Female) | | | |
| Ambient temperature | -25°C~+85°C | | |
| Connector insert | PBT+GF | | |
| Connector contacts | Brass gold plated | | |
| Coupling nut/screw | Brass nickel plated | | |
| Seal / O-ring | FKM | | |
| Insulation resistance | ≥1000MΩ | | |
| Contact resistance | ≤10mΩ | | |
| Shielding | Unavailable | | |
| IP rating | IP67 in locked condition | | |
| Rated current | 5A | | |
| Rated voltage | 300V AC/DC | | |

Part Number

| Pins | Female |
|------|-----------|
| 9 | DBW09FABB |
| 15 | DBW15FABB |
| 25 | DBW25FABB |

Recommended Panel cut

