


D-Sub Male Panel mount, Angled Contacts PCB type

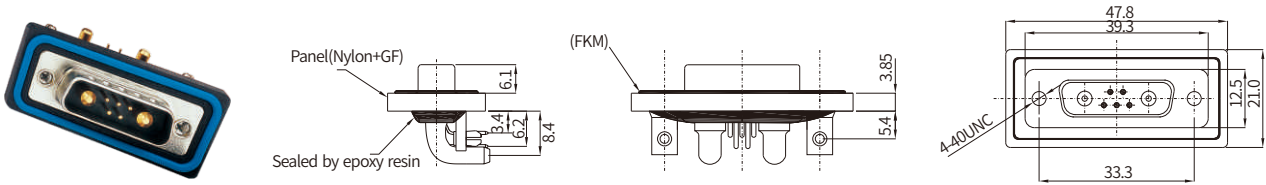

RoHS

Specifications

Contacts	7W2
Pin layout(Female)	
Ambient temperature	-25°C~+85°C
Connector insert	PBT+GF
Connector contacts	Brass gold plated
Coupling nut/screw	Brass nickel plated
Seal / O-ring	FKM
Insulation resistance	≥1000MΩ
Contact resistance	≤10mΩ
Shielding	Unavailable
IP rating	IP67 in locked condition
Mating cycles	>1000 cycles
Rated current	30A(PinA1&A2) / 5A(Pin1~5)
Rated voltage	300V AC/DC

Part Number

Pins	Male
7W2	DBW7W2MANB-A

Recommended Panel cut

