


D-Sub Field Wirable Assembly

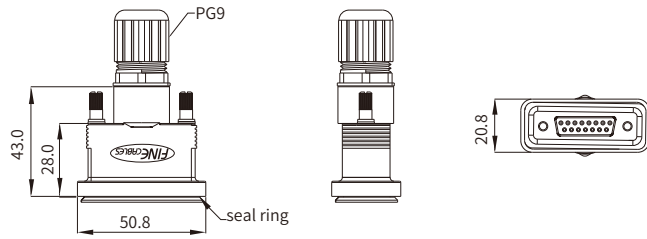

RoHS

Specifications


Contacts	15 Male	15 Female
Pin layout		
Ambient temperature	-25°C~+85°C	
Connector insert	PBT+GF	
Connector contacts	Brass gold plated	
Coupling nut/screw	Brass nickel plated	
Seal / O-ring	FKM	
Insulation resistance	≥1000MΩ	
Contact resistance	≤10mΩ	
Shielding	Unavailable	
IP rating	IP67 in locked condition	
Rated current	5A	
Rated voltage	300V AC/DC	

Part Number


Pins	Male	Female
15	DBW15MSNS-A	DBW15FSNS-A

Assembly Instruction


Step 1 Insert gasket & ring through the screw

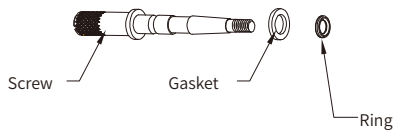

Step 2 Assembly screw into the black plastic housing

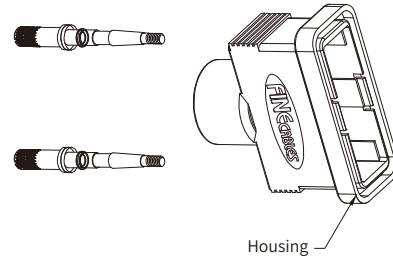

Step 3 Lock the sealing nut

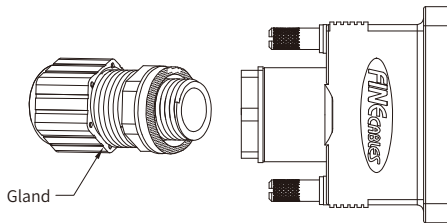

Step 4 Insert gasket onto the housing

