



## Junction Box, 6 Ports, M8 Termination, with M12 Connector







RoHS


## **■** Specifications

Contacts	M8 Pin3 (Female)	M12 Pin12 (Male)
Pin layout	(4O) (3O) 1O)	
Ambient temperature	-25°C~+85°C	
Connector insert	TPU	
Connector contacts	Brass with gold plated	
Material of body	PBT	
Coupling nut/screw	Brass with nickel plated	
Body color	Blue	
Seal	FKM	
Contact resistance	≤ 3mΩ	
Rated voltage with/without LED	10~30V/120V	
Rated current	1A per signal,3A total	
LED color	Optional	
IP rating	IP 67 in locked condition	
Coding type	A-Coding	

## ■ Part Number

Pins	With LED	Without LED
3-12	JB6M8F03L-M12M12	JB6M8F03-M12M12

## **■** Circuit diagram

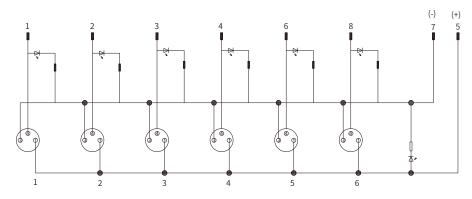

LED indicating: PNP other circuit diagram (NPN) can be customized

564 www.finecables.com