


■ PSA Straight Plug, Coaxial Triaxial, Cable Collet

- Connector series: PSA
- Contact: Male
- Locking type: Self-locking
- Orientation type: Straight
- Part No.: PSA.1E.650.CTACxx(Z)
- Mated with: FSA/FLN series

Note: "X" refers to part number definition on page 101

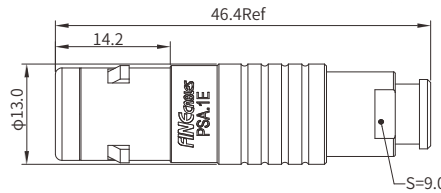

■ General information


Ambient temperature:	-55°C~+200°C
Endurance:	>5000 cycles
Insulator:	PTFE
Connector contacts:	Brass with gold plated
Housing:	Brass with Cr plated
Impedance:	50Ω

Rated current:	6A
VSWR:	1.01+0.17*f/GHz
Insulator resistance:	≥100MΩ
IP rating:	IP 68
Shielding efficiency:	at 10MHz>95dB/at 1GHz>80dB
Salt spray corrosion test:	>144h

■ PSA Straight Plug, 250 Coaxial, Cable Collet

- Connector series: PSA
- Contact: Male
- Locking type: Self-locking
- Orientation type: Straight
- Part No.: PSA.1E.250.CTACxx(Z)
- Mated with: FSA/FLN series

Note: "X" refers to part number definition on page 101

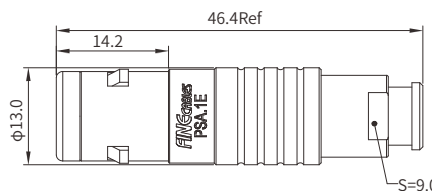

■ General information

Ambient temperature:	-55°C~+200°C
Endurance:	>5000 cycles
Insulator:	PTFE
Connector contacts:	Brass with gold plated
Housing:	Brass with Cr plated
Impedance:	50Ω

Rated current:	12A
VSWR:	1.01+0.23*f/GHz
Insulator resistance:	≥100MΩ
IP rating:	IP 68
Shielding efficiency:	at 10MHz>95dB/at 1GHz>80dB
Salt spray corrosion test:	>144h