


PMG Straight Plug, Key(G), Cable Collet

- Connector series: PMG
- Contact: Male
- Locking type: Screw Locking
- Orientation type: Plug
- Part No.: PMG.RR.3xx.CLACxx
- Mated with: SRG

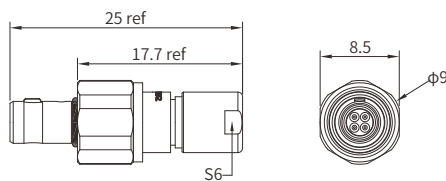

Note: "X" refers to part number definition on page 126

General Information


Ambient temperature:	-20°C ~ + 80°C
Endurance:	>3000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Housing:	Brass with Cr plated

O-ring:	FPM
Insulator resistance:	≥100MΩ
IP rating:	IP 68
Shielding efficiency:	at 10MHz>75dB/at 1GHz>40dB
Salt spray corrosion test:	>144h

SRG Fixed Socket, Key(G), Nut Fixing, Resin Sealing

- Connector series: SRG
- Contact: Female
- Locking type: Screw Locking
- Orientation type: Socket
- Part No.: SRG.RR.3xx.CLL
- Mated with: PMG

Note: "X" refers to part number definition on page 126

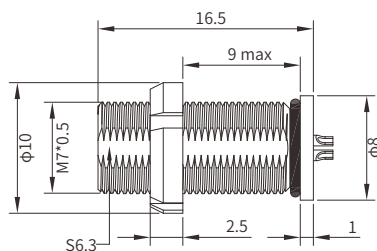

General Information

Ambient temperature:	-20°C ~ + 80°C
Endurance:	>3000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Housing:	Brass with Cr plated

O-ring:	Silicone
Insulator resistance:	≥100MΩ
IP rating:	IP 68
Shielding efficiency:	at 10MHz>75dB/at 1GHz>40dB
Salt spray corrosion test:	>144h

Note: Epoxy resin is used to seal these models Panel cut-out (page 164)