


■ PSA Straight Plug , Cable Collet (One Key)

- Connector series: PSA
- Contact: Male
- Locking type: Self-locking
- Orientation type: Straight
- Part No.: PSA.0R.XXX.CLACXXZ
- Mated with: FSA.0R.XXX.CLV

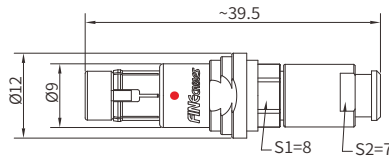

Note: "X" refers to part number definition on page 126


■ General Information

Ambient temperature:	-20°C ~ + 80°C
Endurance:	≥3000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Coupling nut/screw:	Brass with Cr plated

Housing:	Brass with Cr plated
Insulator resistance:	≥100MΩ
IP rating:	IP 68
Shielding efficiency:	at 10MHz>75dB/at 1GHz>40dB
Salt spray corrosion test:	>144h

■ FSA Fixed Socket With Elbow Terminals For Printed Circuit, Front Fasten (One Key)

- Connector series: FSA
- Contact: Female
- Locking type: Self-locking
- Orientation type: Angled
- Part No.: FSA.0R.XXX.CLV
- Mated with: PSA.0R.XXX.CLACXXZ



Note: "X" refers to part number definition on page 126

■ General Information

Ambient temperature:	-20°C ~ + 80°C
Endurance:	≥3000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Coupling nut/screw:	Brass with Cr plated

Housing:	Brass with black Cr plated
Insulator resistance:	≥100MΩ
IP rating:	IP 68
Shielding efficiency:	at 10MHz>75dB/at 1GHz>40dB
Salt spray corrosion test:	>144h