


■ 2P Series, PNB Fixed Straight Socket, Waterproof, Key(B), Contact For Printed Circuit

- Connector series: 2P
- Connector gender: Female
- Key: B
- Locking type: Self-locking
- Orientation type: Straight
- Part No.: PNB.2P.3XX.GLNG
- Mated with: PFB series

Note: "X" refers to part number definition on page 135



■ General Information

Ambient temperature:	-50 °C ~ + 150 °C
Endurance:	>1000 cycles
Insulator:	PEEK
Fixing nut:	PSU
Seal:	Silicone

Outershell:	PSU
Connector contacts:	Bronze with gold plated
Insulator resistance:	≥100MΩ
IP rating:	IP 66


Pin	Dimensions(mm)	
	A	L
302~319	0.7	5.6
326/332	0.5	3.4

Note: Panel cut-out (P 164); PCB drilling pattern (P 166)

■ 2P Series, PFB Straight Plug, key (B), Backnut For Fitting A Bend Relief, High Voltage

- Connector series: PFB
- Contact: Male
- Locking type: Self-locking
- Mounting type: Straight
- Part No.: PFB.2P.326.GTACXXGZ
- Mated with: PNB series

Note: "X" refers to part number definition on page 135

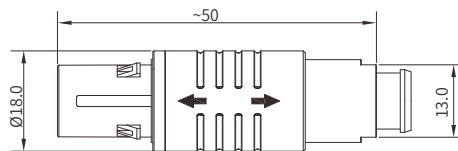

■ General Information

Ambient temperature:	-50 °C ~ + 150 °C
Endurance:	>1000 cycles
Insulator:	PTFE
Connector contacts:	Brass with gold plated

Outershell:	PSU
IP rating:	IP50
Insulator resistance:	≥100MΩ
Backnut:	PSU

	Contact parameter			
	Rated current	Test voltage	ØA (mm)	Adapter wire diameter
	2.5A	4000V	0.5	30AWG