


■ PLG Straight Plug, Nut for Bend Relief, Key(G), Non-latching, Cable Collet

- Connector series: PLG
- Contact: Male
- Key: G(More keys, refer to page 43)
- Locking type: Non-latching
- Orientation type: Straight
- Part No.: PLG.XB.XXX.CLADXXX
- Mated with:  
FSG/SFG/SRG/SEG/FBG/PRG/ASG series  
Note: "X" refers to part number definition on page 17



■ General Information

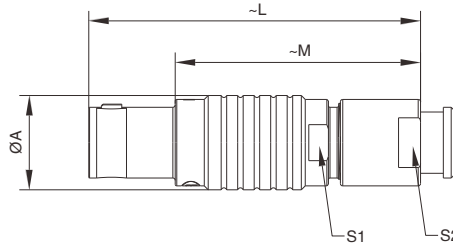


Ambient temperature:	-55°C~+250°C
Mating endurance:	>5000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Housing:	Brass with Cr plated

Insulation resistance:	≥ 100MΩ
IP rating:	IP 50
Shielding efficiency:	at 10MHz>75dB / at 1GHz>40dB
Salt spray corrosion test:	>144h

Size	Dimensions(mm)				
	A	L	M	S1	S2
0B	9.5	35	25	8	7
1B	12.0	42	31	10	9
2B	15.0	49	37	13	12
3B	18.0	56.5	41.5	15	14

■ PLG Straight Plug, Key(G), Non-latching, Cable Collet

- Connector series: PLG
- Contact: Male
- Key: G(More keys, refer to page 43)
- Locking type: Non-latching
- Orientation type: Straight
- Part No.: PLG.XB.XXX.CLADXXX
- Mated with:  
FSG/SFG/SRG/SEG/FBG/PRG/ASG series  
Note: "X" refers to part number definition on page 17

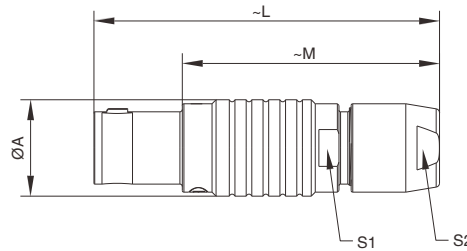

■ General Information



Ambient temperature:	-55°C~+250°C
Mating endurance:	>5000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Housing:	Brass with Cr plated

Insulation resistance:	≥ 100MΩ
IP rating:	IP 50
Shielding efficiency:	at 10MHz>75dB / at 1GHz>40dB
Salt spray corrosion test:	>144h

Size	Dimensions(mm)				
	A	L	M	S1	S2
0B	9.5	36	26	8	7
1B	12.0	43	32	10	9
2B	15.0	50	38	13	12
3B	18.0	58	43	15	14