


■ MSG Fixed Plug, Nut Fixing, Key(G)

- Connector series: MSG
- Contact: Male
- Locking type: Self-locking
- Orientation type: Straight
- Part No.: MSG.1K.XXX.CLA
- Mated with: FSG/SRG series

Note: "X" refers to part number definition on page 48




■ General Information

Ambient temperature:	-55°C ~ + 200°C
Endurance:	>5000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Coupling nut/screw:	Brass with nickel plated
Seal/O-ring:	Silicone

Housing:	Brass with Cr plated
Insulator resistance:	≥100MΩ
IP rating:	IP 68
Shielding efficiency:	at 10MHz>95dB/at 1GHz>80dB
Salt spray corrosion test:	>144h

■ FSG Straight Socket, Key(G), Coaxial + Low Voltage Mixed

- Connector series: FSG
- Contact: Female
- Key: G(More keys, refer to page 66)
- Locking type: Self-locking
- Orientation type: Straight
- Part No.: FSG.4K.864.CLL
- Mated with: PSG

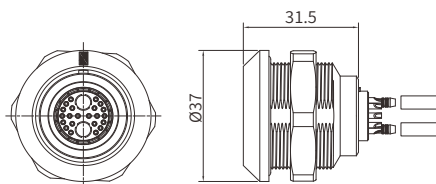

■ General Information

Ambient temperature:	-55°C ~ + 250°C
Endurance:	>5000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Out shell:	Brass with Cr plated

Insulator resistance:	≥100MΩ
IP rating:	IP 68
Shielding efficiency:	at 10MHz>75dB/at 1GHz>40dB
Salt spray corrosion test:	>144h