


## ■ PSA Straight Plug, Coaxial Triaxial, Cable Collet

- Connector series: 1S
- Contact: Male
- Locking type: Push-Pull Self-locking
- Orientation type: Straight
- Part No.: PSA.1S.650.CTACXX
- Mated with: FSA series

Note: "X" refers to part number definition on page 81

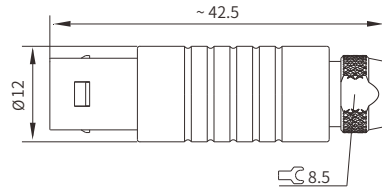



## ■ General Information

Ambient temperature:	-55°C~+250°C
Mating endurance:	>5000 cycles
Insulator:	PTFE
Housing:	Brass with gold plated
Connector contacts:	Brass with nickel plated

Insulation resistance:	≥100 MΩ
Impedance:	50Ω
IP rating:	IP50
VSWR:	1.01+0.17f(GHz)

## ■ FSA Fixed Straight Socket , Coaxial Triaxial

- Connector series: 0S
- Contact: Female
- Locking type: Push-Pull Self-locking
- Orientation type: Straight
- Part No.: FSA.0S.650.CTL
- Mated with: PSA series



## ■ General Information

Ambient temperature:	-55°C~+250°C
Mating endurance:	>5000 cycles
Insulator:	PTFE
Housing:	Brass with Cr plated
Connector contacts:	Brass with gold plated

Insulation resistance:	≥100 MΩ
Impedance:	50Ω
IP rating:	IP68
VSWR:	1.03+0.34f(GHz)

Note: Panel cut-out (page 164)