


## ■ AMG Angled Plug, Key(G), Nut for Bend Relief, Screw Locking, Cable Collet

- Connector series: AMG
- Contact: Male
- Key: G(More keys, refer to page 66)
- Locking type: Screw Locking
- Orientation type: Angled
- Part No.: AMG.2K.3XX.CLACXXZ
- Mated with: FMG

Note: "X" refers to part number definition on page 48

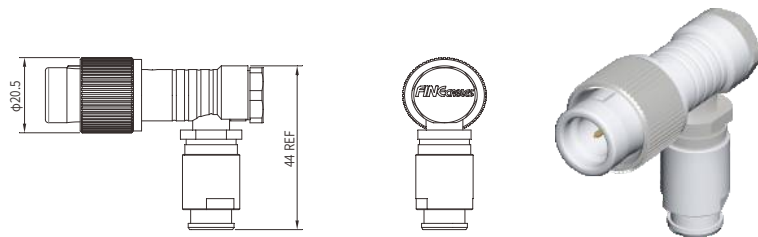

### ■ General Information


Ambient temperature:	-55°C ~ + 200°C
Endurance:	> 3000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Coupling nut/screw:	Brass with Cr plated

Housing:	Brass with Cr plated
Insulator resistance:	$\geq 100\text{M}\Omega$
IP rating:	IP 68
Shielding efficiency:	at 10MHz>75dB/at 1GHz>40dB
Salt spray corrosion test:	>144h

## ■ EDW Straight Socket, Key(G), Quick Locking

- Connector series: EDW
- Contact: Female
- Key: G(More keys, refer to page 66)
- Locking type: Screw Locking
- Orientation type: Straight
- Part No.: EDW.2K.3XX.CLL
- Mated with: PSG.2K

Note: "X" refers to part number definition on page 48

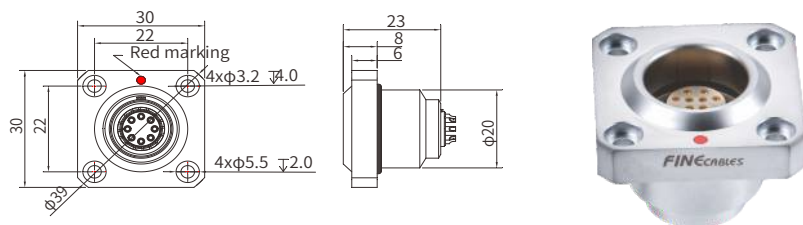

### ■ General Information

Ambient temperature:	-55°C ~ + 200°C
Endurance:	> 3000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Out shell:	Brass with Cr plated

Insulator resistance:	$\geq 100\text{M}\Omega$
IP rating:	IP 68
Shielding efficiency:	at 10MHz>75dB/at 1GHz>40dB
Salt spray corrosion test:	>144h