


### ■ FMG Straight Socket, Key(G), Screw Locking

- Connector series: FMG
- Contact: Female
- Key: G(More keys, refer to page 66)
- Locking type: Screw Locking
- Orientation type: Straight
- Part No.: FMG.2K.3XX.CLL
- Mated with: PMG

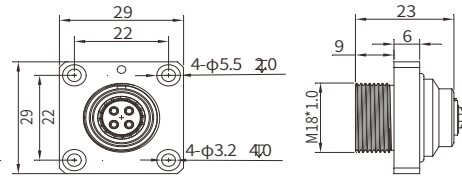

Note: "X" refers to part number definition on page 48


### ■ General Information

Ambient temperature:	-55°C ~ + 200°C
Endurance:	> 3000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Out shell:	Brass with Cr plated

Insulator resistance:	≥ 100MΩ
IP rating:	IP 68
Shielding efficiency:	at 10MHz>75dB/at 1GHz>40dB
Salt spray corrosion test:	>144h

### ■ PMG Straight Plug, Key(G), Nut for Bend Relif, Screw Locking, Cable Collet

- Connector series: PMG
- Contact: Male
- Key: G(More keys, refer to page 66)
- Locking type: Screw locking
- Orientation type: Straight
- Part No.: PMG.2K.3XX.CLADXXZ
- Mated with: FMG

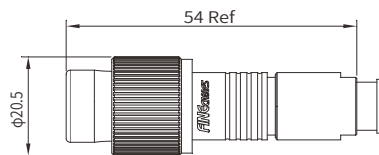

Note: "X" refers to part number definition on page 48

### ■ General Information

Ambient temperature:	-55°C ~ + 200°C
Endurance:	> 3000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Coupling nut/screw:	Brass with Cr plated

Housing:	Brass with Cr plated
Insulator resistance:	≥ 100MΩ
IP rating:	IP 68
Shielding efficiency:	at 10MHz>75dB/at 1GHz>40dB
Salt spray corrosion test:	>144h