


SPE 6P-P8 Male Molded Cable, Push-Pull, Straight, Shielded

Male

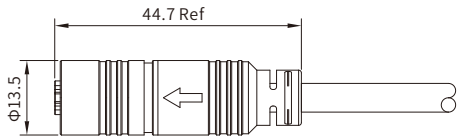

RoHS 

Specifications

Contacts	2
Pinlayout(Male)	
Standard	IEC 63171-6-2021
Ambient temperature	-40°C ~ +80°C(fixed installation) -25°C ~ +80°C(flexible installation)
Connector insert	PA
Connector overmold	TPU
Connector contacts	Brass with gold plated
Insulation resistance	≥ 500 MΩ
Contact resistance	≤ 20 mΩ
Shielding	Available
IP rating	IP67
Mating endurance	>1000 cycles
Rated current	4A
Voltage	60V D/C
Wire gauge / size	0.34mm ² (AWG 22)

Part Number

Pins	Cable length	Male	
		PVC	PUR
2	0.3m	SPEA08MSPP02ST03CB34	SPEA08MSPP02ST03RB34
	1m	SPEA08MSPP02ST10CB34	SPEA08MSPP02ST10RB34
	2m	SPEA08MSPP02ST20CB34	SPEA08MSPP02ST20RB34
	10m	SPEA08MSPP02ST100CB34	SPEA08MSPP02ST100RB34

Default wire colors

Pin No.	
Pin 1	WH 
Pin 2	BU 
Shell	Braid