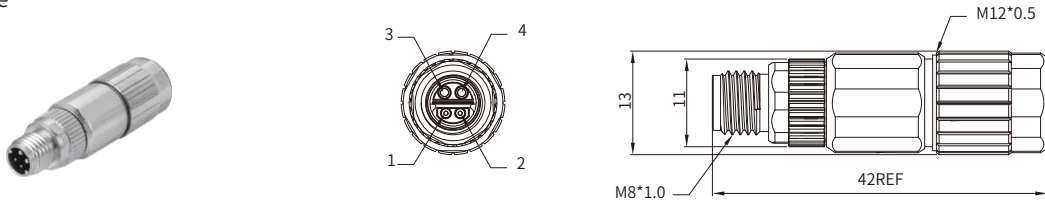


M8 hybrid Connectors, Cable Assembly, Male Straight Shielded

Male

RoHS 

■ Specifications

Contacts	4
Pinlayout(Male)	
Standard	IEC 63171-6-2021
Ambient temperature	-40°C~+80°C
Connector insert	PA
Connector contacts	Brass with gold plated
Connector shield	Zinc alloy
Insulation resistance	≥500 MΩ
Contact resistance	≤20 mΩ
Shielding	Available
IP rating	IP67
Mating endurance	>500 cycles
Insertion/withdrawal force	50N Max.
Rated current	4A (Signal pins) 8A (Power pins)
Voltage	60V D/C
Wire gauge/size	2*0.34mm ² + 2*0.81mm ² (2*22AWG+2*18AWG)

■ Part Number

Pins	Male
4	SPEB08MCSFF04ST

■ Assembly Instruction

