
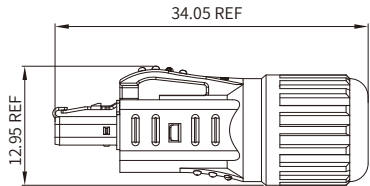


Industrial Connectors, Cable Assembly, Male Straight Shielded

Male



RoHS

Specifications

Contacts	2
Pin layout(Male)	
Standard	IEC 63171-6-2021
Ambient temperature	-40°C ~ + 80°C
Connector insert	PA
Connector contacts	Brass with gold plated
Connector shield	Stainless Steel
Pull-out force	50N Min.
Insulation resistance	≥ 500 MΩ
Contact resistance	≤ 20 mΩ
Shielding	Available
IP rating	IP20
Mating endurance	>1000 cycles
Insertion/withdrawal force	20N Max.
Rated current	4A
Voltage	60V D/C
Wire gauge / size	0.34mm ² (AWG 22)

Part Number

Pins	Male
2	SPEBT1MCSLF02ST

Default wire colors

Pin No.	
Pin 1	WH
Pin 2	BU
Shell	Braid

Assembly Instruction

