


M12 Y3-coding



M12 Y3-coding Straight Connector, Panel, Front Mount, Shielded

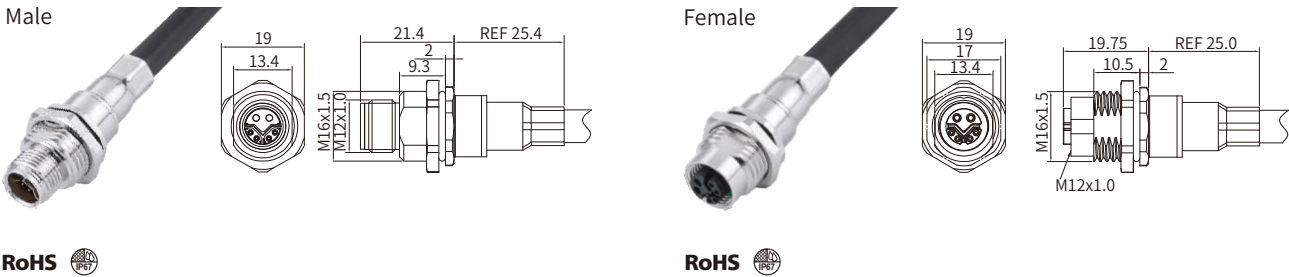

RoHS

RoHS

Specifications

Contacts	6
Pin layout(Male)	
Pin layout(Female)	
Standard	IEC 61076-2-113
Ambient temperature	-15°C~+85°C (flexible installation), -30°C~+85°C (fixed installation)
Customized temperature	-25°C ~ +85°C (flexible installation), -40°C ~ +85°C (fixed installation)
Connector insert	TPU+GF
Connector contacts	Brass with gold plated
Coupling nut/screw	Brass with nickel plated
Seal/O-ring	FKM
Insulation resistance	≥100MΩ
Contact resistance	≤10mΩ
Shielding	Available
IP rating	IP67 in locked condition
Mating endurance	>500 cycles
Rated current	12 A(Power pins) / 0.5A(Data pins)
Rated voltage	50V AC/ DC
Wire gauge	1.25 mm² (AWG 16)(Power pins)/ 0.15 mm² (AWG 26)(Data pins)

Part Number

Pins	Cable length	Male		Female	
		PVC	PUR	PVC	PUR
6	1m	MB12MCSY3FF06ST-10CB25-2	MB12MCSY3FF06ST-10RB25-2	MB12FCSY3FF06ST-10CB25-2	MB12FCSY3FF06ST-10RB25-2
	3m	MB12MCSY3FF06ST-30CB25-2	MB12MCSY3FF06ST-30RB25-2	MB12FCSY3FF06ST-30CB25-2	MB12FCSY3FF06ST-30RB25-2
	5m	MB12MCSY3FF06ST-50CB25-2	MB12MCSY3FF06ST-50RB25-2	MB12FCSY3FF06ST-50CB25-2	MB12FCSY3FF06ST-50RB25-2

Default wire colors

Pin No.	
Pin 1(Data)	WH
Pin 2(Data)	OR
Pin 3(Data)	RD
Pin 4(Data)	GN
Pin 5(Power)	RD
Pin 6(Power)	BK
Shell	Braid

Panel Cut-out Dimensions

