


# M12 Adapter



M12 A-coding Male-Female Panel Mount, M12 Front fastened

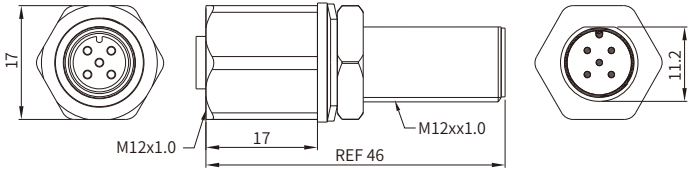

RoHS

## Specifications

Contacts	4	5
Pin layout(Male)		
Pin layout(Female)		
Standard	IEC 61076-2-101	
Ambient temperature	-25°C ~ +90°C	
Connector insert	PA+GF / TPU	
Connector contacts	Brass with gold plated	
Coupling nut/screw	Brass with nickel plated	
Seal/O-ring	Epoxy resin / FKM	
Insulation resistance	≥100MΩ	
Contact resistance	≤5mΩ	
Shielding	Available	
IP rating	IP67, IP68 in locked condition	
Mating endurance	>500 cycles	
Rated current	4 A	
Rated voltage	250V AC/DC	60V AC/DC
Panel cut-out	Refer to page 416	

## Part Number

Pins	Male&Female
4	MT-007
5	MT-008