


M12 Adaptor



M12 X-coding Female-Female Panel Mount, Shielded

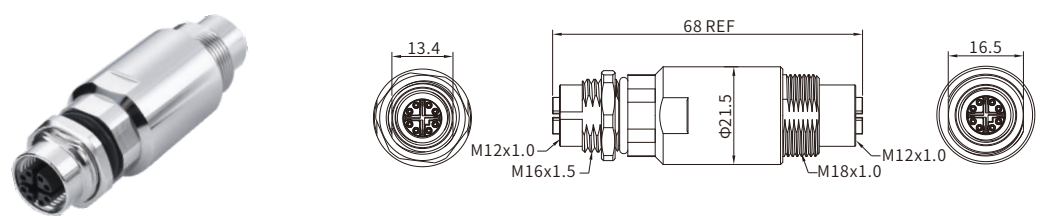

RoHS

Specifications

Contacts	8
Pin layout(Female)	
Standard	IEC 61076-2-109
Ambient temperature	-25°C ~ +90°C
Connector insert	PA / TPU
Connector contacts	Brass with gold plated
Coupling nut/screw	Brass with nickel plated
Seal/O-ring	FKM
Insulation resistance	≥100MΩ
Contact resistance	≤10mΩ
Shielding	Available
IP rating	IP67, IP68 in locked condition
Mating endurance	>500 cycles
Rated current	4 A
Rated voltage	50V AC 60V DC

Part Number

Pins	Male&Female
8	MT-078

Panel Cut-out Dimensions

